

Knock Monitor Connection for Mitsubishi 4G63

10 P 18 P 24 P

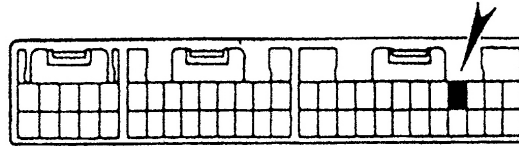


Diagram 1, Pin 4 of 24 pin top row

26 P 16 P 22 P

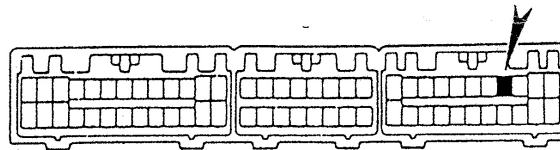


Diagram 2, Pin 4 of 22 pin top row

26 P 16 P 12 P 22 P

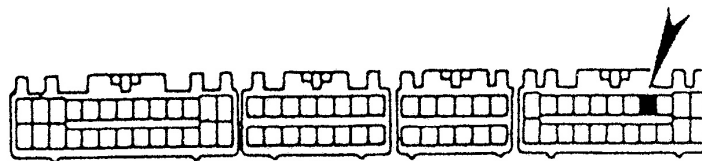


Diagram 3, Pin 4 of 22 pin top row

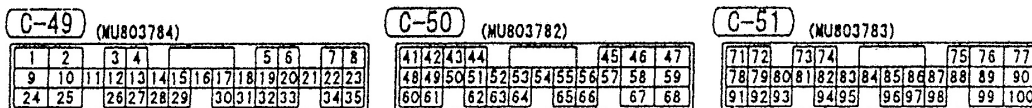


Diagram 4, Pin 91

Identify the knock sensor signal wire from the above diagrams and connect the white wire from the supplied harness to it. A splice connector is supplied for use if desired.

Car	Chassis	Model Number	Engine Code	Year	ECU Diag.
RVR Space Wagon	N23W		4G63	1991 – 92 1992 on	1 2
Galant	E39A	VR - 4	4G63T	1987 - 92	1
Lancer	CD 9A CE 9A CN 9A	Evo I Evo II , Evo III Evo IV - Evo VII Evo VIII	4G63T	1992 – 93 1993 – 96 1996 - 03 2003 on	2 2 3 4